

GeneQueryTM Human Neural Development and Regeneration qPCR Array Kit (GQH-NDR)

Catalog #GK006

Product Description

ScienCell's GeneQueryTM Human Neural Development and Regeneration qPCR array kit (GQH-NDR) is designed to facilitate gene expression profiling of key genes involved in (i) human neurogenesis, migration and adhesion; (ii) neural development and differentiation; (iii) neural regeneration; as well as (iv) key genes in related degeneration diseases, such as Alzheimer's Parkinson's and Huntington's diseases. 88 genes are selected in this kit based on database and literature research.

GeneQueryTM qPCR array kits are qPCR ready in a 96-well plate format, with each well containing one primer set that can specifically recognize and efficiently amplify a target gene's cDNA. The carefully designed primers ensure that: (i) the optimal annealing temperature in qPCR analysis is 65°C (with 2 mM Mg²⁺, and no DMSO); (ii) the primer set recognizes all known transcript variants of target gene, unless otherwise indicated; and (iii) only one gene is amplified. Each primer set has been validated by qPCR with melt curve analysis, and gel electrophoresis.

GeneQueryTM qPCR Array Kit Controls

Each GeneQueryTM plate contains eight controls (Figure 1).

- Five target housekeeping genes (ACTB, GAPDH, LDHA, NONO, and PPIH), which enable normalization of data.
- The Genomic DNA (gDNA) Control (GDC) detects possible gDNA contamination in the cDNA samples. It contains a primer set targeting a non-transcribed region of the genome.
- Positive PCR Control (PPC) tests whether samples contain inhibitors or other factors that
 may negatively affect gene expression results. The PPC consists of a predispensed
 synthetic DNA template and a primer set that can amplify it. The sequence of the DNA
 template is not present in the human genome, and thus tests the efficiency of the
 polymerase chain reaction itself.
- The No Template Control (NTC) is strongly recommended, and can be used to monitor the DNA contamination introduced during the workflow such as reagents, tips, and the lab bench.

Kit Components

Component	Cat #	Quantity	Storage
GeneQuery TM array plate with lyophilized primers	GK006	1	4°C or -20°C
Optical PCR plate seal	N/A	1	RT
Nuclease-free H ₂ O	GQ100-1	2	4°C

Additional Materials Required (Materials Not Included in Kit)

Component	Recommended			
Reverse transcriptase	First-Strand cDNA Synthesis Master Mix, 4x (ScienCell, Cat #MB6008)			
cDNA template	Customers' samples			
qPCR master mix	GoldNStart TaqGreen qPCR Master Mix (ScienCell, Cat #MB6018)			

Quality Control

All the primer sets are validated by qPCR with melt curve analysis. The PCR products are analyzed by gel electrophoresis. Single band amplification is confirmed for each set of primers.

Product Use

GQH-NDR is for research use only. It is not approved for human or animal use, or for application in clinical or *in vitro* diagnostic procedures.

Shipping and Storage

The product is shipped at ambient temperature. Upon receipt, the plate should be stored at 4°C and is good for up to 12 months. For long-term storage (>1 year), store the plate at -20°C in a manual defrost freezer.

Procedures

Note: The primers in each well are lyophilized.

- 1. Prior to use, allow plates to warm to room temperature.
- 2. Briefly centrifuge at 1,500x g for 1 minute before slowly peeling off the seal.
- 3. Prepare 20 µl PCR reactions for one well as shown in Table 1.

Table 1

cDNA template	0.2 – 250 ng
2x qPCR master mix	10 μ1
Nuclease-free H ₂ O	variable
Total volume	20 μl

Important: Only use polymerases with hot-start capability to prevent possible primer-dimer formation. Only use nuclease-free reagents in PCR amplification.

4. Add the mixture of 2x qPCR master mix, cDNA template, and nuclease-free H₂O to each well containing the lyophilized primers. Seal the plate with the provided optical PCR plate seal.

Important: In NTC control well, do NOT add cDNA template. Add 2x qPCR master mix and nuclease-free H2O only.

- 5. Briefly centrifuge the plates at 1,500x g for 1 minute at room temperature. For maximum reliability, replicates are strongly recommended (minimum of 3).
- 6. For PCR program setup, please refer to the instructions of the master mix of the user's choice. We recommend a typical 3-step qPCR protocol for a 200nt amplicon:

Three-step cycling protocol

Step	Temperature	Time	Number of cycles
Initial denaturation	95°C	10 min	1
Denaturation	95°C	20 sec	
Annealing	65°C	20 sec	40
Extension	72°C	20 sec	40
Data acquisition	Plat	e read	
Recommended	Melting curve analysis		1
Hold	4°C	Indefinite	1

7. (Optional) Load the PCR products on 1.5% agarose gel and perform electrophoresis to confirm the single band amplification in each well.

Figure 1. Layout of GeneQuery $^{\text{TM}}$ qPCR array kit controls.

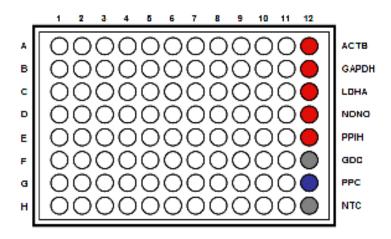


Table 2. Interpretation of control results:

Controls	Results	Interpretation	Suggestions
Housekeeping gene controls	Variability of a housekeeping gene's Cq value	The expression of the housekeeping gene is variable in samples; cycling program is incorrect	Choose a constantly expressed target, or analyze expression levels of multiple housekeeping genes; use correct cycling program and make sure that all cycle parameters have been correctly entered
gDNA Control (GDC)	Cq ≥ 35	No gDNA detected	N/A
	Cq < 35	The sample is contaminated with gDNA	Perform DNase digestion during RNA purification step
Positive PCR	Cq > 30; or	Poor PCR performance;	Eliminate inhibitor by purifying
Control (PPC)	The Cq variations > 2 between qPCR Arrays.	possible PCR inhibitor in reactions; cycling program incorrect	samples; use correct cycling program and make sure that all cycle parameters have been correctly entered
No Template Control (NTC)	Positive	DNA contamination in workflow	Eliminate sources of DNA contamination (reagents, plastics, etc.)

Figure 2. A typical amplification curve showing the amplification of a qPCR product.


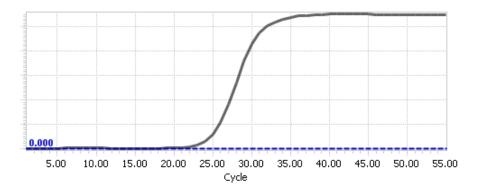


Figure 3. A typical melting peak of a qPCR product.

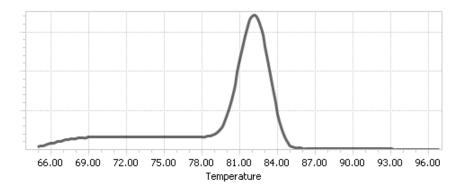

Quantification Method: Comparative ΔΔCq (Quantification Cycle Value) Method

1. **Note:** Please refer to your qPCR instrument's data analysis software for data analysis. The method provided here serves as guidance for quick manual calculations.

You can use one or more housekeeping genes as a reference to normalize samples.

Important: We highly recommend using all 5 housekeeping genes included in this kit: ACTB, GAPDH, LDHA, NONO, and PPIH.

2. For a single housekeeping gene, Δ Cq (ref) is the quantification cycle number change for that housekeeping gene (HKG) between an experimental sample and control sample.

$$\Delta$$
Cq (ref) = Cq (HKG, experimental sample) - Cq (HKG, control sample)

When using multiple housekeeping genes as a reference, we recommend normalizing using the geometric mean [1] of the expression level change, which is the same as normalizing using the arithmetic mean of Δ Cq of the selected housekeeping genes.

 Δ Cq (ref) = average (Δ Cq (HKG1), Δ Cq (HKG2),......, Δ Cq (HKG n)) (n is the number of housekeeping genes selected)

If using all 5 housekeeping genes included in this kit (ACTB, GAPDH, LDHA, NONO, and PPIH) use the following formula:

$$\Delta$$
Cq (ref) = (Δ Cq(ACTB)+ Δ Cq(GAPDH)+ Δ Cq(LDHA)+ Δ Cq(NONO)+ Δ Cq(PPIH)) /5

Note: Δ Cq (HKG) = Cq (HKG, experimental sample) - Cq (HKG, control sample), and Δ Cq (HKG) value can be positive, 0, or negative.

3. For any of your genes of interest (GOI),

$$\Delta$$
Cq (GOI) = Cq (GOI, experimental sample) - Cq (GOI, control sample)

$$\Delta\Delta$$
Cq = Δ Cq (GOI) - Δ Cq (ref)

Normalized GOI expression level fold change = $2^{-\Delta\Delta Cq}$

References

[1] Vandesompele J, De Preter K, Pattyn F, Poppe B, Van Roy N, De Paepe A, Speleman F. (2002) "Accurate normalization of real-time quantitative RT-PCR data by geometric averaging of multiple internal control genes." *Genome Biol.* 3(7): 1-12.

Example: Comparative ΔΔCq (Quantification Cycle Value) Method

Table 3. Cq (Quantification Cycle) values of 2 genes-of-interest and 5 housekeeping genes obtained for experimental and control samples.

	Genes of	Interest	Housekeeping Genes				
Samples	GOI1	GOI2	ACTB	GAPDH	<i>LDHA</i>	NONO	PPIH
Experimental	21.61	22.19	17.16	17.84	20.12	19.64	26.40
Control	33.13	26.47	18.20	18.48	20.57	19.50	26.55

$$\Delta$$
Cq (ref) = (Δ Cq(ACTB)+ Δ Cq(GAPDH)+ Δ Cq(LDHA)+ Δ Cq(NONO)+ Δ Cq(PPIH)) /5 = ((17.16-18.20)+(17.84-18.48)+(20.12-20.57)+(19.64-19.50)+(26.40-26.55))/5 = -0.43

$$\Delta$$
Cq (GOI1) = 21.61 - 33.13
= -11.52

$$\Delta$$
Cq (GOI2) = 22.19 - 26.47
= -4.28

$$\Delta\Delta$$
Cq (GOI1) = Δ Cq (GOI1) - Δ Cq (ref)
= -11.52 - (-0.43)
= -11.09

$$\Delta\Delta$$
Cq (GOI2) = Δ Cq (GOI2) - Δ Cq (ref)
= -4.28 - (-0.43)
= -3.85

Normalized GOI1 expression level fold change =
$$2^{-\Delta\Delta Cq}$$
 (GOI1)
= $2^{11.09}$
= 2180

Normalized GOI2 expression level fold change =
$$2^{-\Delta\Delta Cq}$$
 (GOI2)
= $2^{3.85}$
= 14.4

Conclusion: Upon treatment, expression level of GOI1 increased 2,180 fold, and expression level of GOI2 increased 14.4 fold.



GeneQuery™ Human Neural Development and Regeneration qPCR Array Kit (GQH-NDR)

Catalog #GK006

GeneQueryTM Human Neural Development and Regeneration qPCR Array Plate Layout* (8 controls in Bold and Italic)

	1	2	3	4	5	6	7	8	9	10	11	12
Α	ABCA1	APP	BMP8B	DCX	GDNF	IL3	NEUROD1	NRP1	PARD3	POU4F1	S100B	ACTB
В	ABCA7	ARTN	CD33	DRD2	GPI	KMT2A	NEUROG1	NRP2	PARK2	PSEN1	SEPT5	GAPDH
C	ACHE	ASCL1	CDK5R1	EFNB1	HDAC4	LRP1	NEUROG2	NSG1	PARK7	PSEN2	SLC6A3	LDHA
D	ADORA1	BCL2	CDK5RAP2	EGF	HES1	MAP2	NOG	NTF3	PAX3	PTN	SLIT2	NONO
E	ADORA2A	BDNF	CLU	EP300	HEY1	MDK	NOTCH1	NTF4	PAX5	RAC1	SNCA	PPIH
F	APBB1	BIN1	CREB1	EPHA1	HEYL	MEF2C	NOTCH2	NTN1	PAX6	REST	SOX2	GDC
G	APBB2	BMP2	CREBBP	ERBB2	HTR2A	NDN	NR4A2	OLIG2	PICALM	ROBO1	TGFB1	PPC
H	APOE	BMP4	CXCL1	FGF2	HTT	NDP	NRCAM	PAFAH1B1	PINK1	S100A6	TNR	NTC

^{*} gene selection may be updated based on new research and development

Appendix. Plate type choice chart.

Plate type A

Brand	Model	kit catalog #
ABI / Life Tech	ABI 5700	GK006-A
	ABI 7000	GK006-A
	ABI 7300	GK006-A
	ABI 7500	GK006-A
	ABI 7700	GK006-A
	ABI 7900 HT	GK006-A
	QuantStudio	GK006-A
	ViiA 7	GK006-A
Bio-Rad	Chromo4	GK006-A
	iCycler	GK006-A
	iQ5	GK006-A
	MyiQ	GK006-A
	MyiQ2	GK006-A
Eppendorf / Life Tech	Matercycler ep realplex 2	GK006-A
	Matercycler ep realplex 4	GK006-A
Stratagene	MX3000P	GK006-A
2.1.2.1.2.5	MX3005P	GK006-A

Plate type B

Brand	Model	kit catalog #
ABI / Life Tech	ABI 7500 Fast	GK006-B
	ABI 7900 HT Fast	GK006-B
	QuantStudio Fast	GK006-B
	StepOnePlus	GK006-B
	ViiA 7 Fast	GK006-B
D'. D. I	05V 0	O14000 B
Bio-Rad	CFX Connect	GK006-B
	CFX96	GK006-B
	DNA Engine Opticon 2	GK006-B
Stratagene	MX4000	GK006-B

Plate type C

Brand	Model	kit catalog #
Roche	Lightcycler 96	GK006-C
	Lightcycler 480 (96-well)	GK006-C